

serie/series

# lyras 65

**LED**  
powered by  
Seoul® Semiconductor Z5M

simmetrico  
symmetric  
symétriques  
simétrico  
symmetrisch

example code:  
art. LED anodized  
4696 L5 L5 inx


art.  
**4696**

design Ufficio Tecnico Landa

corpo alluminio estruso  
anodizzato  
body in extruded anodized  
aluminium  
corps en aluminium extrudé  
anodisé  
cuerpo en aluminio  
extrusionado y anodizado  
Körper aus eloxiertem  
fließgepresst Aluminium

diffusore vetro trasparente  
e opale  
diffuser glass transparent  
and opal  
diffuser verre transparent  
et opale  
difusor vidrio transparente  
y ópalo  
Diffuser Glas klar und opal

PROJECTORS  
4



III IK08

FOR TECHNICAL DETAILS VISIT  
[www.landa.it](http://www.landa.it)

IP67

art.	LUX 1mt	art.	LUX 1mt	art.	LUX 1mt	W	V	Type	Ra
4696LS5	4220	4696LL5	820	4696L5	140	5	24	6000°K 580LM	70
4696LS5H	3740	4696LL5H	700	4696L5H	124			3000°K 480LM	80

Transformer available:

cod. 0409BT014 to connect up to 2 pieces – GE LIGHTING IP67 24V c.c. 12W  
cod. 0409BT015 to connect up to 4 pieces – GE LIGHTING IP67 24V c.c. 25W

Transformer on request:

cod. 0409BT016 to connect up to 16 pieces – GE LIGHTING IP67 24V c.c. 100W


ANODIZED  
brz inx

ELECTRIFICATION

**LED**

dettagli / details / details  
detalles / details:  
p.A46-A47

Energy efficiency classes

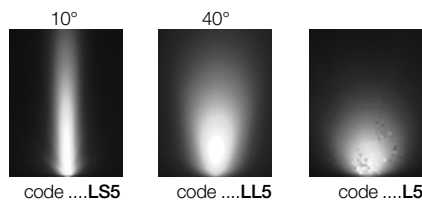


A++ ÷ A

# lyras 65 (24V)

NEW PROJECTORS



5 | PROJECTORS



code 00A469  
Mounting spike

LED



ENERGY  
SAVING