

# Dôležité informácie:

LED PANEL 600 Sphinx01PF / LED PANEL 600 Sphinx02 / LED PANEL 600 Sphinx03PF / LED PANEL 600 Sphinx04 Step

## TENTO DOKLAD SLUŽI AKO ZÁRUČNÝ LIST


LED PANEL 600 Sphinx01PF  
LED PANEL 600 Sphinx02  
LED PANEL 600 Sphinx03PF  
LED PANEL 600 Sphinx04 Step

### POZOR:


Inštaláciu svietidla zverte len odborne spôsobilej osobe!

### POZOR:

Svietidlo musí byť počas inštalácie odpojené od elektrického prúdu!

1. Inštaláciu svietidla zverte len odborne spôsobilej osobe.
2. Pred inštaláciou (prípadne pred akoukoľvek manipuláciou po inštalácii) vypnite prívod elektrického prúdu.
3. Pri výrobku označenom značkou dvojitej izolácie  (izolačná trieda II, svietidlá s externým napájacím zdrojom) zapojte čierny (hnedý) vodič na svorku L a svetlomodrý vodič na svorku nulovacieho vodiča (N, stredný vodič).
4. V prípade poruchy nikdy nezasahujte do elektroinštalácie a vyhľadajte autorizovaného predajcu - servis.
5. Za škody vzniknuté neodbornou montážou a manipuláciou nepreberá výrobca žiadnu záruku.


**Rozmery:** LED PANEL 600 Sphinx01PF  
LED PANEL 600 Sphinx02  
LED PANEL 600 Sphinx03PF  
LED PANEL 600 Sphinx04 Step

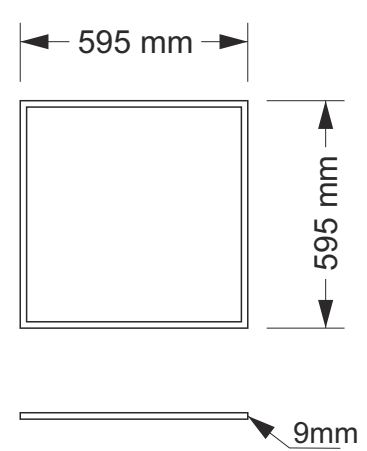

595 mm  
595 mm  
9mm







**Driver (Predradník):**  
LED Driver 600 Sphinx36WPF  
LED Driver 600 Sphinx40WPF

Prívodný vodič 230V









**MODEL: LED Driver 600 Sphinx36WPF**  
10832459.com

Input (Pri.)		Output (Sec.)	
N	Input voltage: 110-260V AC 50/60Hz	Output current: 600mA	→ RED+
L	Power Factor (PF) > 0.9	Output voltage DC: 42-65V	→ BLACK-
	Ta: 45°C Tc: 75°C Overheat & short circuit protection	Output power: 36W	

CE       10832459.com 8586018421225 Made in China I015/09  
Importer: SLOS, NLS 24, B. Bystrica, SK

**MODEL: LED Driver 600 Sphinx40WPF**  
10832459.com


Input (Pri.)		Output (Sec.)	
N	Input voltage: 110-260V AC 50/60Hz	Output current: 600mA	→ RED+
L	Power Factor (PF) > 0.9	Output voltage DC: 54-75V	→ BLACK-
	Ta: 45°C Tc: 75°C Overheat & short circuit protection	Output power: 40W	

CE       10832459.com 8586018421218 Made in China I015/10  
Importer: SLOS, NLS 24, B. Bystrica, SK

**Zmena farby svetla platí pre svietidlo LED PANEL 600 Sphinx04 Step a pre driver LED Driver 600 Sphinx04 Step**







**Driver (Predradník):**  
LED Driver 600 Sphinx04 Step

Prívodný vodič 230V






**MODEL: LED Driver 600 Sphinx04 Step**  
10832459.com

Input (Pri.) (Vstup)		Output (Sec.) (Vystup)	
N	AC 170-265V 50/60Hz	DC 20-36V 1200mA	→ RED+ (Warm)
L			→ BLACK- (Cool)
			→ WHITE- (Mix)

CE       10832459.com 8586018421218 Made in China I015/10  
Importer (Dovozca): SLOS, NLS 24, B. Bystrica, SK

**Zmena farby svetla:**

-  1x KLIK: teplá / warm (3000K)
-  2x KLIK: studená / cool (6000K)
-  3x KLIK: MIX (4000K)